


Primary applications:

In Vivo Imaging
Calcium Imaging
Cell Physiology
Live Cell Microscopy
Single Molecule Fluorescence

Available with Exclusive
excelon™
 Technology

photometrics
evolve™



Evolve® 128 EMCCD 24 x 24-μm pixels

- ▶ Smallest, most powerful scientific EMCCD camera on the market
- ▶ Most advanced feature set available for low-light applications
- ▶ Lowest dark current available for an EMCCD camera
- ▶ Lowest read noise available for an EMCCD camera
- ▶ Superb electron multiplication (EM) gain and bias stability
- ▶ Most accurate EM calibration technique in the industry
- ▶ Available with exclusive eXcelon™ technology
- ▶ Backed by Photometrics' worldwide support team
- ▶ Ideal for sophisticated researcher and multi-user labs

Features	Benefits
EM gain	Very high sensitivity Low-noise, impact-ionization process
Back-illuminated EMCCD	CCD60 or CCD60-X (with eXcelon technology), highest available quantum efficiency (>92% peak QE)
128 x 128 imaging array 24 x 24-μm pixels	Optimized field of view and highest sensitivity
Intelligent FPGA design	Precise linearization of EM gain Self-calibrating linearization ensures truly quantitative data consistently, time and again Ensures bias stability to guarantee a stable background
PAR feedback system (Photometrics Active Regulation)	Delivers unsurpassed EM gain stability for outstanding signal fidelity across 16 bits
ACE technology (Advanced Clocking Enhancement)	Pixel-clock timing resolution 12x better than other EMCCD cameras Provides lowest noise floor and minimizes generation of spurious charge and background events
10-MHz readout	Excellent for high-speed image visualization
16-bit digitization	Wide dynamic range allows detection of bright and dim signals in the same image
Frame-transfer EMCCD	100% duty cycle to collect continuous data No mechanical shutter required
C- mount	Easily attaches to microscopes, standard lenses, or optical equipment
Turbo-1394™ interface (IEEE-1394a)	Universally accepted interface that provides high-bandwidth, uninterrupted data transfer with no dropped frames Windows® XP/Vista/7 (Mac OS X compatibility to follow)
PVCam® Circular buffers Device sequencing	Supported by numerous third-party software packages Real-time focus Precise integration with shutters, filter wheels, etc.
Exclusive eXcelon Technology (optional)	Enhanced QE in Blue and near IR wavelengths Anti-Etalonning in near IR wavelengths

* Patent-pending Photometrics technology


Photometrics Advanced Features

Features	Benefits
Quant-View®	Allows camera to read out pixel values in terms of electrons measured, thereby enabling user to calculate actual photon flux
Electrons-per-gray-level selector	Allows user to select how many electrons will cause a single gray-level increase in the image data, thus permitting utilization of Quant-View while maintaining full dynamic range of EMCCD
Rapid-Cal®	3-minute EM calibration process is most accurate in industry; camera does not need to be detached from microscope; no special attachments required; user-initiated
Background Event Reduction Technology®	Identifies pixels that are likely to contain spurious event data and then makes corrections, if desired
Black-Lock® / Top-Lock®	Intensity-filtering tool narrows visualization to the intensity range of the image features in which the user is most interested
Vari-Bit® selectable bit depth (8-16 bits)	Improves image quality by matching digitization bit depth to actual intrascene dynamic range


The Photometrics Evolve 128 is the ultimate deep-cooled, back-thinned EMCCD camera. Years of engineering expertise have enabled Photometrics to perfect every element of the Evolve 128. The Evolve 128 offers life science researchers the world's first advanced feature set designed specifically for EMCCD cameras and for low-light-level bio-imaging applications. Each of the Evolve camera's revolutionary features can easily be enabled or disabled by the camera user via software control. This sophisticated functionality enhances the quantitative nature of the camera while simultaneously allowing researchers to concentrate on acquiring image data relevant to their work.

Specifications		
Read noise (e- rms @ Gain State 3) 10 MHz EM Port	46e- (Gain State 2)	
Pixel Well Depth		
Active area	200,000e-	
Gain register	800,000e-	
Bias stability A measurement of the camera stability when no light hits the sensor. A slope of zero would be ideal. See footnote #1.	≤0.001 ADU/Frame	
Gain stability A measurement of the stability of the electron multiplication applied to images. Ideal value would be 0. The stability of the EM gain applied can be quantified by measuring the slope of a sequence of images with known amount of light and EM Gain applied. See footnote #2.	≤0.3 ADU/Frame (@ 10MHz, 350X, Gain State 2, 20K ADU)	
Field uniformity The image quality of the EMCCD is assessed for gradients. A complete lack of any gradient (i.e a flat image) would provide a numerical value of 1.00 See footnote #3.	10 MHz EM	1.07
Baseline bias value	500ADU but can be varied	
Cooling temperature	Air cooled (@ ambient air 20°C)	-85°C
Dark current	0.0069 e-/pixel/sec (See footnote #4.)	
Background events (10 MHz, 1000X EM gain) Standard operation	0.01 events/pixel	
Relative charge transfer efficiency Photometrics is able to measure this on each camera and optimize this parameter.	Optimized on each camera (See footnote #6.)	
Charge transfer efficiency	As specified by CCD manufacturer's data sheet (See footnote #7.)	
Dark signal non-uniformity (DSNU)	As specified by CCD manufacturer's data sheet (See footnote #7.)	
Photoresponse non-uniformity (PRNU)	As specified by CCD manufacturer's data sheet (See footnote #7.)	
Parallel shift rate	100 ns. This is optimized with Charge Transfer Efficiency (CTE) and CIC. Test results demonstrate that increasing parallel shift rate further can decrease CTE and increase CIC, adversely affecting image quality and sensitivity.	


Note: Specifications are subject to change.

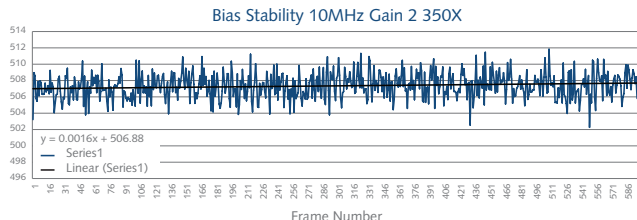

Note: Actual data.

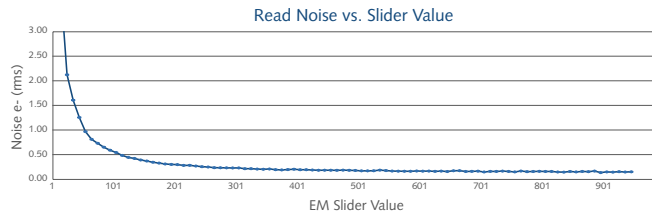

Note: Actual data, not theoretical.

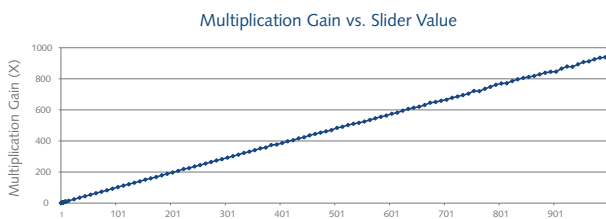

Note: Actual data from camera.



Binning	Region		
	128 x 128	64 x 64	32 x 32
1 x 1	530	992	1799
2 x 2	992	1799	2907
4 x 4	1792	2900	4237
8 x 8	2887	4209	

(Frames per second)

Note: Frame rates are measured at 10 MHz with 0-second exposure times.

Exclusive eXcelon Technology (optional)

eXcelon™

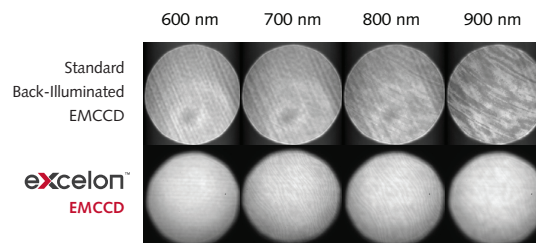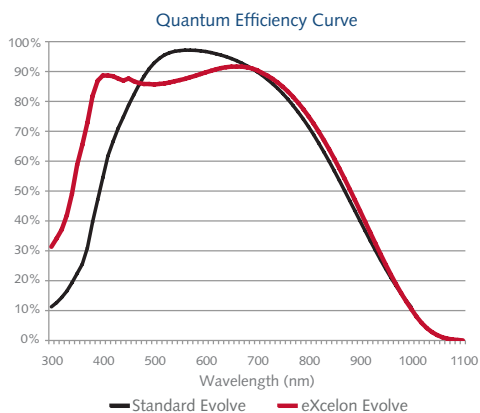

Reduced Etaloning

Up to 10 times lower etaloning in near IR wavelengths compared to standard back-illuminated sensors

Improved Sensitivity

Provides higher QE in the blue (<450nm) and near IR (>700nm)




Exclusive Technology

Available on Evolve EMCCD Cameras

Liquid Cooled Evolve 128 EMCCD Camera (optional)

- Ideal for vibration-sensitive applications (eg. Atomic Force Microscopy)
- -85°C with ambient liquid*
- -100°C with 0°C circulating liquid* (typical)
- Provides significantly lower dark current - 0.0015 e/p/sec

*Note: Use of Equipment not originally provided by Photometrics for use with Liquid Cooled Cameras will void any and all warranty coverage of the product. This is due to the specific requirements of the cooling system and camera based on the type of liquid, liquid viscosity, flow rate, among other key factors to achieve the specified performance levels.

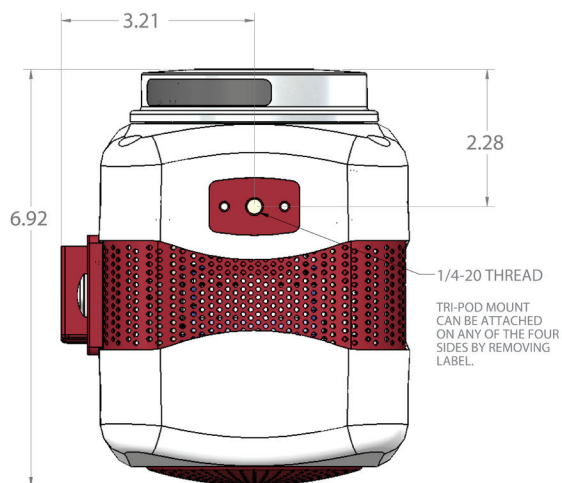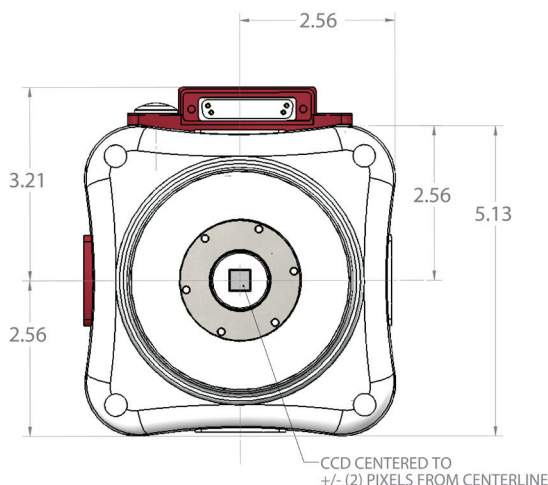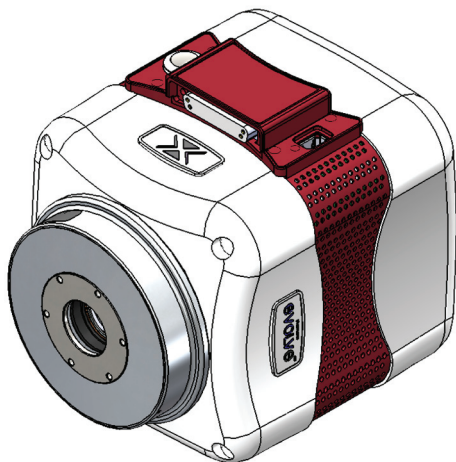

#1 Bias stability – The imaging stability of the EMCCD camera can be assessed by measuring its output with no light falling on the sensor and measuring the slope of the average intensity. The slope of the average intensity value of a 200 frame sequence (where $y=mx+b$ of the least squares fit) is measured.

#2 Gain stability – The actual amount of EM Gain applied on each image in a stream of images can vary depending on many electrical engineering factors. The slope of the average intensity value of a 200 frame sequence (where $y=mx+b$ of the least squares fit) (@ 10MHz, 350X, GS 3, 20K ADU) is measured. An ideal value would be zero.

#3 Field uniformity – Specification was obtained using the following formula: $-\sigma(\text{bias})/(\sigma(\text{bias}_1 - \text{bias}_2) * .707) \leq 1.15$

#4 Dark current – This is measured in a traditional manner (as with all CCD cameras) by taking a long integration to obtain a signal. An average measurement is taken over the CCD area (excluding blemishes). It should be noted that dark current can vary significantly between different CCDs, and the numbers here are typical.

#5 Background events – As EMCCD cameras are actually capable of detecting single photons, the real detection limit of these cameras is set by the number of dark background events. These can arise from two things, dark current (which is thermal generation of an electron and is a temperature dependent phenomenon) and also clock induced charge (CIC) electrons (also called spurious charge). Each can lead to the generation of non-photon derived electrons which are multiplied through the electron-multiplication register, generating random high value pixels which are above the read noise.

These background events are measured by taking 30 ms exposure at 10MHz speed with 1000X EM Gain applied and counting the number of random high value pixels which are at a single event threshold above the modal value of the image histogram. This number is expressed as a probability of an event per pixel. The number can vary from frame to frame and sensor to sensor; however, a typical value is provided.

#6 Relative CTE – Photometrics employs an unpublished trade secret way of optimizing charge transfer efficiency. We have been doing this for years and are able to measure relative charge transfer efficiency and actually tune each camera in order to optimize this parameter. This ensures better optimal image performance.

#7 <http://www.e2v.com/products-and-services/high-performance-imaging-solutions/space---scientific-imaging/technical-papers/>

Photometrics and PVMcam are registered trademarks of Photometrics. ACE, Background Event Reduction Technology, Black-Lock, Evolve, PAR, Quant-View, Rapid-Cal, Top-Lock and Vari-Bit are trademarks of Photometrics. Mac OS is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers. Product photography © 2008, Jay Ganaden Photography.

USA 520.889.9933
Asia Pacific +65.6841.2094

France +33.1.60.86.03.65
Germany +49.89.660.779.3

Japan +81.3.5639.2731
UK +44.1628.890858

 **PHOTOMETRICS®**
www.photometrics.com
info@photometrics.com